

### Pipe Lasers



#### Maximum productivity

- Fast self-leveling
- Automatic target alignment
- Cross axis compensation



#### Maximum robustness

- IP68 protection
- Full metal housing
- Built to last



#### Maximum flexibility

- Wide range of accessories
- Long distance remote control
- Safe and versatile charging options



# Zeta125 Series


The various models of the Zeta125 Series give you the flexibility to choose a device that perfectly fits your needs. With the outstanding grade range from -10% to 40%, the Zeta125 is very versatile.

The Zeta125S pipe lasers make your work more convenient and safer. Thanks to the unique vertical alignment, which can be easily performed with the remote control and a laser receiver, there is no need to climb down into the trench.

The Zeta125G, with the green laser, provides four times higher visibility, superior leveling accuracy and allows greater working distances. These features help you achieve the best visibility in nearly any working condition at a distance up to 650 feet (200 m). You can be confident that you will achieve maximum efficiency with this pipe laser.

## Compact Form

The Zeta125 fits in tight bends and narrow manholes. Due to its slim housing, it is suitable for pipes with 125 mm (5") diameter. With their light weight and rubber feet, Zeta lasers will remain stable on any pipe material.

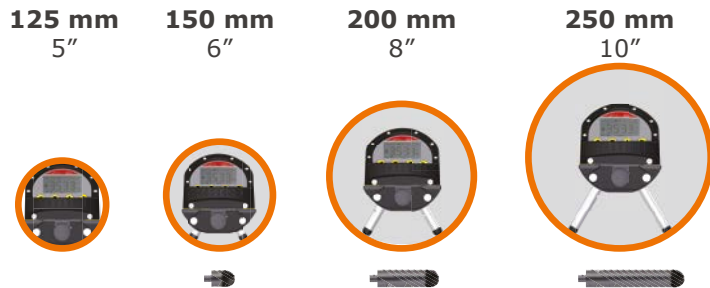

|                       | Zeta125  | Zeta125 US | Zeta125G | Zeta125G US | Zeta125S       | Zeta125SG      |
|-----------------------|--|------------|----------|-------------|----------------|----------------|
| Laser beam            | Red  |            | Green    |             | Red            | Green          |
| Laser class           | 2  | 3R         | 2M       | 3R          | 3R             | 3R             |
| Cross axis leveling   | Manual   |            |          |             | Automatic (6°) | Automatic (6°) |
| Vertical level        |  | x          |          |             | ✓              | ✓              |
| Autotarget system     |  | x          |          |             | ✓              | ✓              |
| Manual alignment      |  | x          |          |             | ✓              | ✓              |
| Self-leveling range   | -15% to +45%   |            |          |             |                |                |
| Grade range           | -10% to +40%   |            |          |             |                |                |
| Protection            | IP68   |            |          |             |                |                |
| Power supply          | Rechargeable lithium ion battery pack<br>110/230V AC converter (charge and run simultaneously); 12V power cord |            |          |             |                |                |
| Battery life          | 40h Li-Ion battery   |            |          |             |                |                |
| Thread mounting       | 5/8"   |            |          |             |                |                |
| Operating temperature | +50°C to -20°C (122°F to -4°F)   |            |          |             |                |                |
| Size and weight       | 305 (12") x 105 (4.1") x 113 mm (4.4"); 2.07 kg  |            |          |             |                |                |
| Operating range       | < 200 m (656')   |            |          |             |                |                |
| Detection angle       | 20° (12 m / 40' @ 30 m / 100')   |            |          |             |                |                |
| Rotation speed        | 1250 rpm   |            |          |             |                |                |
| <b>REMOTE CONTROL</b> |  |            |          |             |                |                |
| Operating range       | 190 m (600') front through the pipe; 7.6 m (25') from rear   |            |          |             |                |                |
| Batteries             | 3 AA alkaline  |            |          |             |                |                |
| Dimensions            | 119 x 60 x 30 mm (4.7" x 2.35" x 1.2")   |            |          |             |                |                |



02/21 842539 enus Copyright GeoMax AG.  
Illustrations, descriptions and technical specifications are not binding and may change. All trademarks and trade names are those of their respective owners.

GEOMAX AUTHORIZED DISTRIBUTION PARTNER

Learn more at:  
[geomax-positioning.com](http://geomax-positioning.com)