


PRECISION PLUMB LASER

QUAD 1000

ACCURATE • VERSATILE • EASY TO USE

Elevator Shafts High-Rise jobs Towers Smoke Stacks Tank Distortion Measurement

Or any job requiring zenith-vertical control

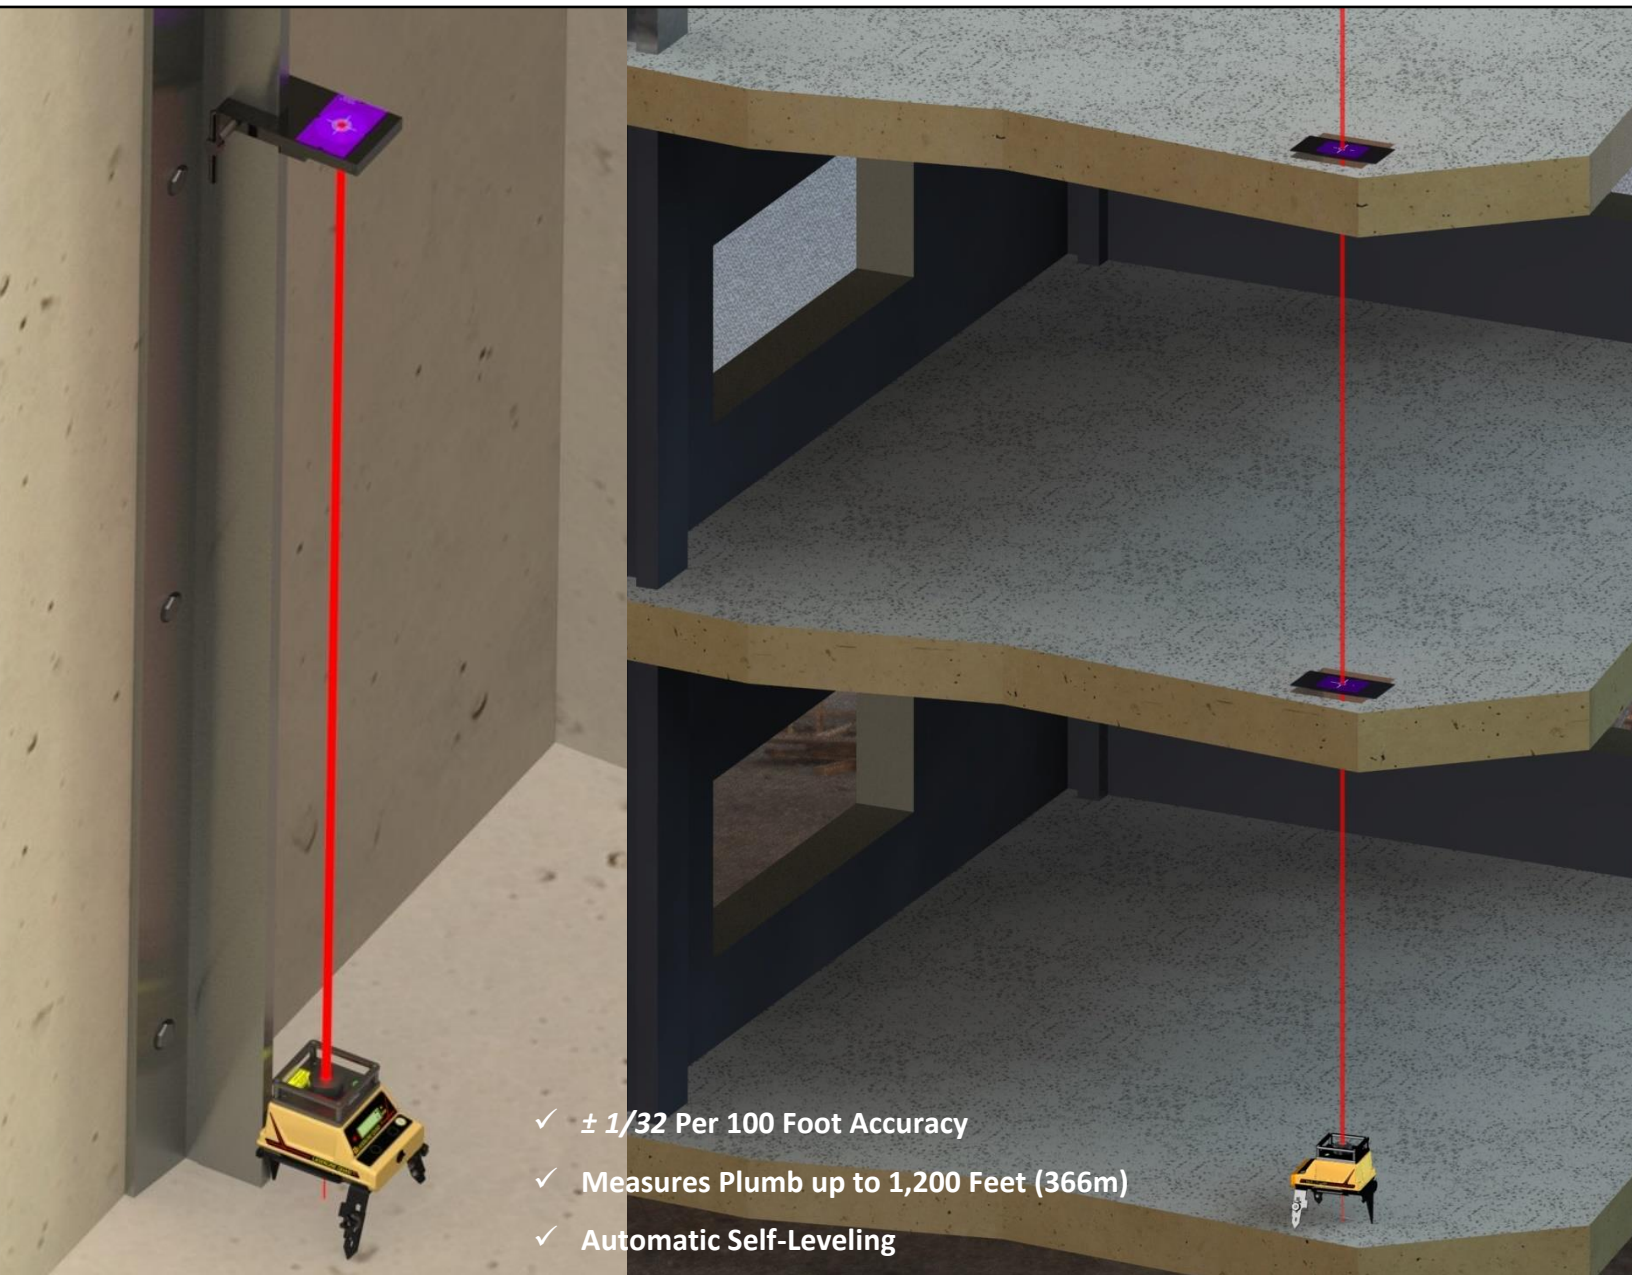

- ✓ $\pm 1/32$ Per 100 Foot Accuracy
- ✓ Measures Plumb up to 1,200 Feet (366m)
- ✓ Automatic Self-Leveling

L LASERLINE MFG., INC.
www.laserlinemfg.com



QUAD 1000 Long Range Precision Plumb Control

Three simple ways to get over your point

1




Special trivet mount gets the Quad 1000 five inches over your reference point, For a fast and stable set-up.

2




The Quad 1000 mounts to any 5/8 x 11 standard flat head tripod.

3

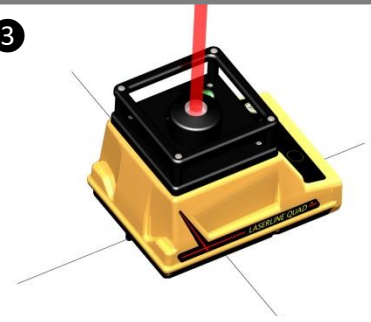

The Quad 1000 base features built-in centering notches to align the laser over your point when placing on deck.

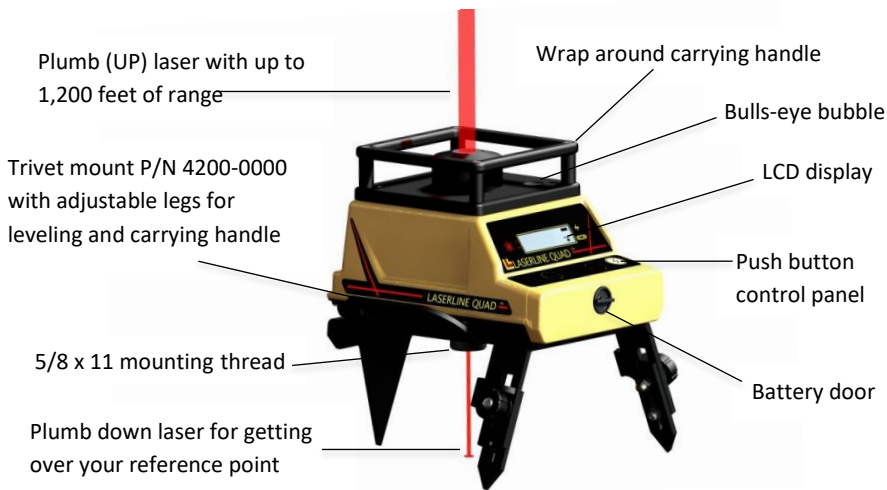

Plumb (UP) laser with up to 1,200 feet of range

Wrap around carrying handle

Bulls-eye bubble

Trivet mount P/N 4200-0000 with adjustable legs for leveling and carrying handle


LCD display

Push button control panel

5/8 x 11 mounting thread

Battery door

Plumb down laser for getting over your reference point

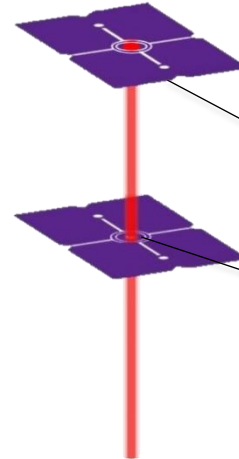

Exclusive target template with "ultra-bright" technology for the most visible and precise readings at any distance.

- Special hard coating protects graphics on the target face.

- Targets feature laser pass through allowing multiple readings at one time.

Specifications

Self-Leveling: Electronic servo with variable temperature compensation
Self-Leveling Range: $\pm 2^\circ$
Plumb Beam UP Accuracy: ± 5 arc seconds/ ($\pm 1/32$ per 100ft)

Plumb Beam UP Range: 1,200ft. (366m)
(Depending on conditions)

Plumb Beam UP Spot Size: At Source (.500" / 12.7mm)
(Nominal)
 @300' / 91m (.375" / 9.52mm)
 500' / 152m (.500" / 12.7mm)
 700' / 213m (.687" / 17.46mm)
 900' / 274m (.875" / 22.22mm)
 1,200' / 366m (1.15" / 29.3mm)

Plumb Beam Down Accuracy / Range: 1 arc min. @ 15ft. (4.57m)
(For getting over a point)

Laser Wavelength: 635nm

Laser Power: 4.5mw up / 1.0mw down

U.S.A. CDRH Class IIIa

International IEC 60825-1 2014 Class 3R

U.S.A OSHA compliant: Meets all Federal and International standards

Power Source: 4ea. D-cell alkaline batteries / 140 hrs. battery life
(Depending on conditions)

Operating Temperature: 0° to 122°F (-18° to 50°C)

Storage Temperature: -4° to 158°F (-20° to 70°C)

Dust and Water Sealed: To IP65 standards

Dimensions: 6 1/2 inch / 16.51cm = H

6 1/2 inch / 16.51cm = W

9 1/4 inch / 23.5cm = L

Weight: 7.25 lbs. (3.28k)

Warranty: 24 months parts and labor for defected workmanship and material



1810 SE First Street Ste. H • Redmond, OR 97756

Phone: 541-548-0882 • Fax: 541-548-0892

Email: Laserline@laserline.net • Web: www.laserlinemfg.com



[YOUR LOCAL DEALER]