


The R8 offers maximum performance to compliment the **L4.7 MAGNUM**. Adjustable accuracy and tone settings, front and rear LCD displays, 5 channel height information and a universal rod clamp make the R8 very flexible.

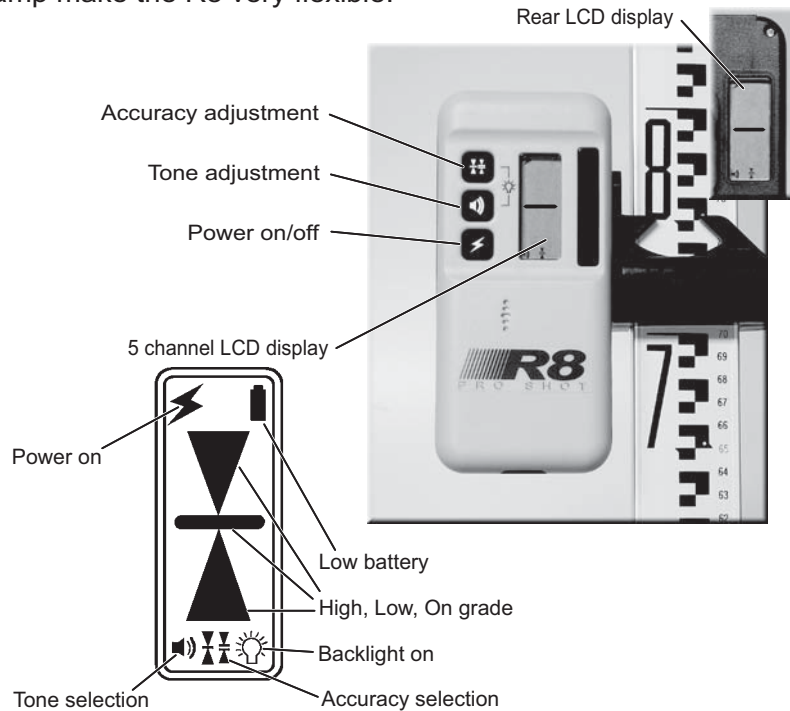

**Note: The L4.7 MAGNUM laser beam must be rotating with the rotation speed set to maximum when using a receiver.**

**R8 Receiver specifications**

- Reception Height ..... 2 inches (50mm)
- Reception Angle ..... 90 degrees
- Standard mode accuracy .. ±1/16 in. (±1.6mm) nominal
- Coarse mode accuracy ..... ±1/8 in. (±3.2mm) nominal
- Ultra-fine mode accuracy .. ±1/32 in. (±1mm) nominal
- Power Supply ..... 2 AA batteries
- Battery life (alkaline) ..... >70 hours continuous
- Automatic Shut Off ..... After 30 min. (no laser strikes)
- Environmental ..... Sealed against dust and water
- Adjustable tone volume .... High / Low / Off
- Warranty ..... Defects coverage - 24 months